

Network Automation Engine

Product Bulletin

MS-NAE35xx-x, MS-NAE45xx-x
MS-NAE55xx-x, NAE8500-0

Code No. LIT-1201160

Software Release 5.2

Issued December 9, 2011

Supersedes November 23, 2011

Refer to the [QuickLIT Web site](#) for the most up-to-date version of this document.

Network Automation Engines (NAEs) enable Internet Protocol (IP) connectivity and Web-based access to Metasys® Building Management Systems (BMSs).

NAEs leverage standard building management communication technologies, including BACnet® protocol, LONWORKS® network, and N2 Bus protocol to monitor and supervise a wide variety of Heating, Ventilating, and Air Conditioning (HVAC); lighting; security; and fire safety equipment.

NAEs provide comprehensive equipment monitoring and control, scheduling, alarm and event management, energy management, data exchange, data trending, and data storage.

NAEs feature an embedded Site Management Portal user interface, support multiple concurrent Web browser sessions with password and permission access control, and provide the protection of industry standard Information Technology (IT) security.

NAE55 models support a comprehensive set of supervisory features and functions for large facilities and technically advanced buildings and complexes.



Figure 1: NAE55 Network Automation Engine

The NAE35/NAE45 models enable cost-effective NAE connectivity and control in smaller facilities, and can increase distribution of control in larger facilities.

The NAE85 is a high-capacity NAE that allows integration of large BACnet IP systems and can take the place of multiple NAEs.

Table 1: Features and Benefits

Features	Benefits
Communication Using Commonly Accepted IT Standards, Including Web Services, at the Automation and Enterprise Level	Allows you to install a system on your existing IT infrastructure within a building or enterprise and use standard IT communication services over the company intranet, Wide Area Network (WAN), or public Internet with firewall protection.
Web-Based User Interface	Allows you to access system data in the NAEs from any supported Web browser device connected to the network including remote users connected by dial-up telephone or an Internet Service Provider (ISP).
Site Director Function	Allows you to access all data on one site through one device. The device designated as the Site Director coordinates the display of data from multiple NAE devices for easy navigation through the entire site.
User Interface and Online System Configuration Software Embedded in NAE	Allows configuration, commissioning, data archiving, monitoring, commanding, and system diagnosis from any device with Web browser software and does not require separate workstation software.
Supervision of Field Controller Networks Including BACnet MS/TP, N2 Bus, LONWORKS Network, and BACnet IP Devices	Supports connectivity to open network standards for complete flexibility in the selection of field devices. Supported protocols include BACnet Master-Slave/Token-Passing (MS/TP), BACnet IP, LONWORKS, and N2 Bus.
Multiple Connection Options for Data Access	Allow connection of a Web browser via the Internet Protocol (IP) network using the Ethernet port. For a dial-up connection, use the optional internal or external modem.

NAE Networking

NAEs have multiple connection port options that allow you to build an extremely flexible network at the automation and enterprise level of your system, as well as at the field controller and data acquisition levels.

Web Browser Access

You view building systems through the NAE with a supported Web browser on a desktop or laptop computer. The computer does not require any special workstation software, just a supported browser and a standard Java® plug-in. The Web browser accesses the NAE directly over the IP network, or via the Internet or public telephone service.

IP Ethernet Network

NAEs connect directly to IP Ethernet networks running at 10 or 100 Mbps. NAE55xx-2 and NAE85 engines can also connect to 1 Gbps networks. Multiple NAEs communicate with each other over the network, and one NAE can act as the Site Director.

Authorized users log on to the Site Director via a supported browser to access the entire Metasys system for the site. Data transmission on the network uses standard IT protocols, services, and formats.

You can interconnect Networks in different buildings using standard WAN technologies and network service providers. The speed of transmission depends on the technology used.

Remote NAE

You can access the NAE remotely over standard WAN infrastructures, over the Internet using an ISP line, or over the public telephone network using a modem and Point-to-Point Protocol (PPP). Specified NAE models offer an optional internal modem; most models support an external modem.

Application and Data Server (ADS)/ Extended Application and Data Server (ADX)

The ADS/ADX is an optional software package running on a computing platform that provides a location for storage of the system configuration database, trend logs, alarm logs, audit trails, and graphics.

You can also configure an ADS/ADX as the Site Director to allow more concurrent users and coordinate access to all components on a site via a Web browser connected over the network, Internet, or telephone line via dial-up communication. Refer to the *Application and Data Server (ADS/ADX) Product Bulletin (LIT-1201525)* for more information about ADSs and ADXs.

Field Networks and Protocols

The NAE communicates data from one field network to another and from the field network level to the enterprise and automation network level, enabling your system to operate as one virtual control network.

Automation Level Communication

NAEs communicate internal system data using peer-to-peer messaging over the IP Ethernet network. Each NAE shares data and has access to information on the other NAEs connected on the network, which enables coordination and control of the entire building management system.

BACnet Protocol

The automation level communication also supports the BACnet protocol and facilitates the network integration of other systems and devices that use BACnet. You can also integrate the Johnson Controls® N30 Supervisory Controller into the NAE network at the automation level using BACnet services.

The NAE supports the BACnet services and objects typically used by a workstation and a field controller device, including BACnet alarm and event services.

Refer to the *NAE/NCE Protocol Implementation Conformance Statement Technical Bulletin (LIT-1201532)* for detailed information on BACnet conformance and the supported BACnet Interoperability Building Blocks.

MS/TP Field Controller (FC) Bus

The BACnet MS/TP FC Bus is a standard peer-to-peer, multiple-master protocol in which each master device takes turns originating messages to pass to any device on the bus.

NAEs can communicate via the MS/TP FC Bus with the Metasys Field Equipment Controller family of controllers, including FEC16 and FEC26 field equipment controllers; VMA16 variable-air-volume controllers; and IOM17, IOM27, IOM37, and IOM47 input/output control modules.

NAEs can also communicate over the FC Bus with TEC26xx Series thermostat controllers and third-party MS/TP devices that comply with the BACnet standard protocol based on American National Standards Institute/American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ANSI/ASHRAE) Standard 135-2004.

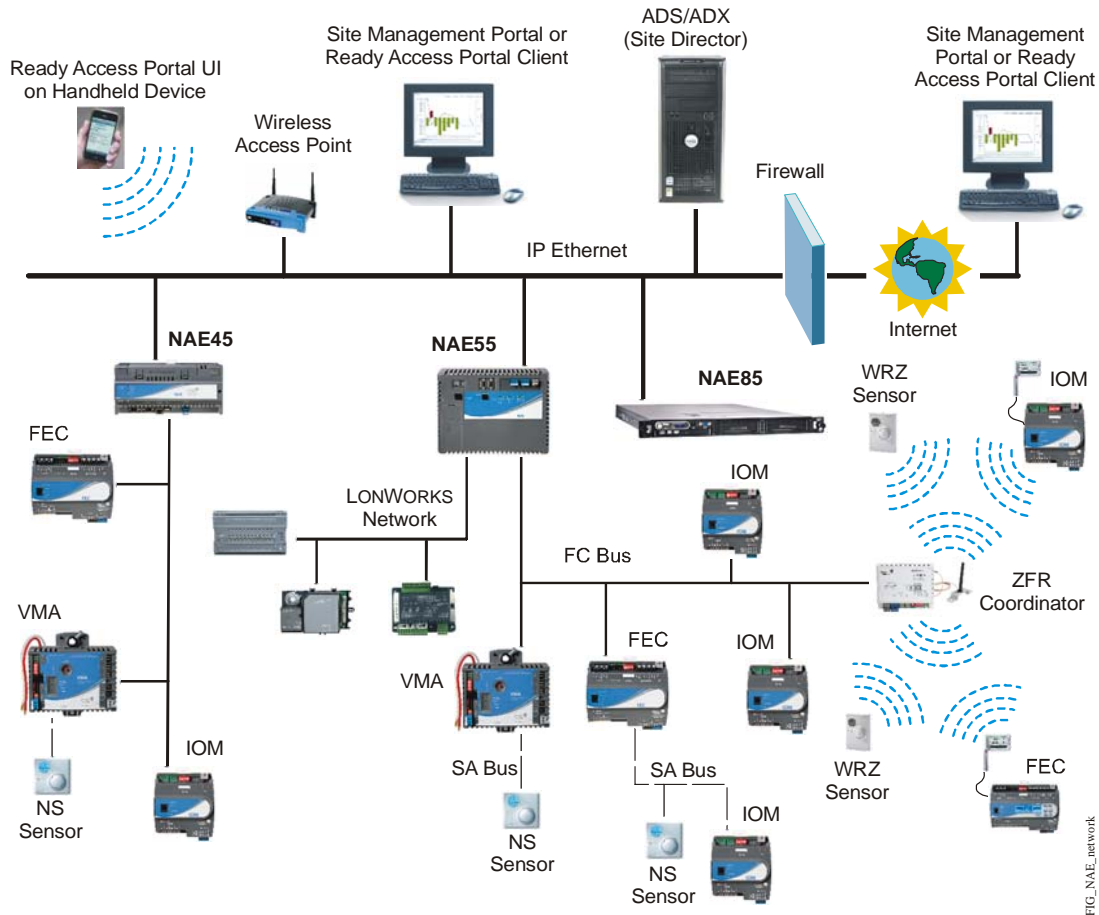


Figure 1: Diagram of Metasys Network with NAEs

N2 Bus

The N2 Bus is an open Johnson Controls field communications trunk that links Application Specific Controllers (ASCs) and programmable controllers to a supervisory controller. ASCs include the Air Handling Unit (AHU) controller, Unitary (UNT) controller, VAV controllers, and VAV Modular Assembly devices. Programmable controllers include the DX9100.

The N2 Bus supports Metasys system compatible devices from other manufacturers and the Metasys Integrator® system.

LONWORKS Bus

Specified NAE models can supervise LONWORKS devices, if the network interface follows current LONMARK® guidelines, and uses the Free Topology Transceiver (FTT)10. The LONWORKS network interface in specified NAE models supports all current LONMARK certified devices including Johnson Controls devices, such as the LN Series Controllers, the NexSys® controller line, and the LONWORKS enabled programmable Flexible System Controller (FSC).

Software for Efficient Building Operation

NAEs ship with the latest version of the Metasys system software, which provides the following features:

- **Metasys Site Management Portal User Interface** provides data and graphic screens to supported Web browsers. Authorized users simply log on to the NAE from the Web browser to access the Site Management Portal. This embedded user interface is ideal for smaller networks and remote locations where a dedicated computer platform to support a user interface is not required.

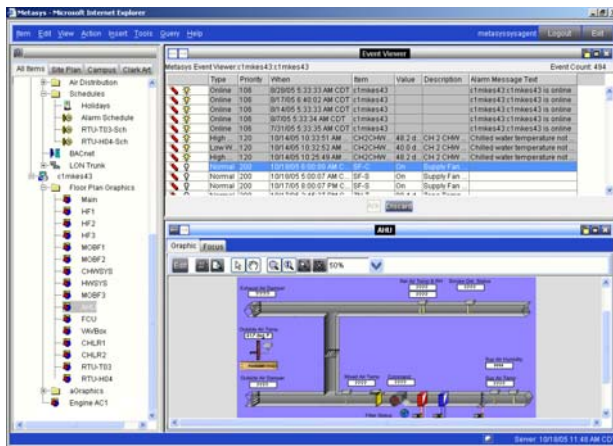


Figure 3: Metasys Site Management Portal Screen

- **System Security** enables an NAE to recognize legitimate users with valid user IDs and passwords at the Site Management Portal user interface. User access data is encrypted in the transmission and in the NAE database. The system administrator manages user profiles, authorization levels, user ID, password, and specific NAE data access privileges in each user account.
- **Basic Access** allows access to a subset of the standard Site Management Portal capabilities based on their assigned permissions.
- **Monitoring and Control** all the mechanical and electrical systems in a typical building by collecting data from the field devices and then coordinating and sending the required commands to the controlled equipment at the required priority.
- **Global Search** allows you to search the Metasys system and manage lists of objects, which can be used by other features for commanding, trending, reporting, and object selection.
- **Global Command** allows you to send a single command to multiple objects, and view a log of the command results.
- **Transaction Recording** audits and logs all user actions performed through the NAE.
- **Alarm and Event Processing** enables NAEs to send alarm and event messages to Web browsers, pagers, e-mail servers, Network Management Systems, and serial printers, as well as store and view alarm and event logs on the NAE and transfer the data to an ADS/ADX.
- **Historical Trend Data** can be collected by NAEs for any monitored value at user-defined intervals, or trending can be based on Change-of-Value. You can use trend logs to analyze building system performance and locate system problems. You can transfer NAE trend logs to the ADS/ADX at defined intervals or when the NAE logs are full.
- **Totalization Data** allows you to monitor energy (and other consumables) use and generate cost reports to support utility cost reductions, and also provides data for service, maintenance, and early identification of building system problems.
- **Trend Studies** allows you to view multiple trend extensions in a single view to facilitate monitoring and troubleshooting your Metasys site.
- **Scheduling** allows you to define occupancy periods and start and stop times for mechanical or electrical equipment. Operating parameters can be set according to time of day, day/days of the week, holiday, or for calendar dates.
- **Network-Wide System Interlocking** enables NAEs to collect field controller data, make logical comparisons, and issue relevant commands to other field controllers anywhere on the network.
- **Optimal Start** automatically determines the best time to start heating and cooling systems to ensure that the facility is ready for occupants. It adjusts to seasonal variations and reduces energy use.
- **Demand Limit and Load Rolling (DLLR)** monitors energy meters for electricity, gas, steam, or water, and automatically sheds equipment loads according to user-defined levels. Demand Limit helps manage utility demand charges. Load Rolling controls equipment operating levels to reduce total energy consumption. Comfort overrides prioritize equipment shedding.

- **Database Configuration Management** allows you to define the Metasys system configuration and database offline for download to the NAE. All the required database configuration software resides on the NAE or SCT. You do not need a copy of the database on your local client computer to make authorized changes.

Metasys for Validated Environments

We designed Metasys for Validated Environments (MVE) extended architecture for Johnson Controls customers who manage facilities that require compliance to Food and Drug Administration (FDA) Title 21, Code of Federal Regulations (Part 11), and other electronic information management requirements. MVE provides:

- precise digital control of the facility environment
- electronic records and signatures
- time-stamped audit and events trail
- secure user access
- Web-based advanced reporting
- scalable configuration
- intuitive Web browser interface

The MVE feature is available on NAE55 models only.

Hardware Features

NAE35, NAE45, and NAE55



Figure 4: NAE45 Network Automation Engine

Depending on the model, an NAE35, NAE45 (Figure 4), and NAE55 (Figure 1) provide the following features for the building controls market:

- industrial Single Board Computer (SBC)
- nonvolatile solid-state Flash memory to store all programs and data
- standard Universal Serial Bus (USB) connections

- battery backup to save data from Dynamic Random Access Memory (DRAM) into Flash memory when power to the NAE is interrupted
- real-time clock with battery backup
- Light-Emitting Diodes (LEDs) to indicate power, communications, and fault, to allow easy servicing
- optional internal modem
- removable screw terminals for 24 VAC power and field network bus connections
- standard 9-pin sub-D connectors for RS-232-C serial ports
- 6-pin modular telephone line connector for internal modem
- RJ-45 connector for Ethernet connection

NAE85



Figure 5: NAE85 Network Automation Engine

The NAE85 (Figure 5) has most of the same functions and capabilities as the NAE35, NAE45, and NAE55; features a scalable design; and integrates large numbers of BACnet IP devices into your Metasys network. The NAE85 is available in a 1U rack-mount chassis configuration.

The NAE85 does **not** support:

- BACnet MS/TP field controllers
- N2 Bus networks
- LONWORKS networks
- dial-out to an ADS/ADX
- device Reset command in the Metasys Site Management Portal UI
- upgrade using the NAE/NIE Update Tool

NAE Series Comparison

Table 2 contains a brief comparison of the features of the different NAE Series engines. (Not all features are available on every model in a series.)

Table 2: Comparison of Features for NAE Models

Features	NAE85	NAE55	NAE45	NAE35
Number of N2 or BACnet MS/TP Trunks	None	2	1	1
Maximum Number of N2 or MS/TP Devices per Trunk	None	100	100	50
Maximum Number of Objects	25,000 ¹	5,000	2,500	2,500
Model with Internal Modem	No	Available	Available	Available
RS-232-C Serial Ports	None	2	1 or 2	1 or 2
USB Serial Ports	2	2	1	1
Ethernet Ports	1	1	1	1
LonWORKS Network Support (Number of Devices)	No	Available (255)	Available (127)	Available (64)
Smoke Control Applications (UUKL Listed)	No	Available	Available	Available

1. Standard is 10,000 objects; 15,000 object upgrade available.

Conclusion

The NAE affirms Johnson Controls position as a leader in the BMS industry and as an innovator of solutions for the complete management of buildings. The integration of Information Technology and Internet standards into the NAE platform, as well as the use of open protocols for field networks, bring the benefits of the global communications and control industries into one system. Web browser-based access from any location is a key to the effective use of the automation network.

The Metasys system continues to be the integrating network within buildings and has now been extended to bridge the gap between traditional control systems and the business and communication network systems of the enterprise.

The Metasys Network Automation Engine and Metasys Web-enabled network are wise investments that yield returns to the building owner and operator far into the future.

Ordering Information

Contact the nearest Johnson Controls representative to order an NAE. Specify the desired product code from Table 3 for the NAE35, Table 4 for the NAE45, Table 5 for the NAE55, Table 6 for the NAE85, and Table 7 for accessories.

Table 3: NAE35 Ordering Information (Part 1 of 2)

Product Code Number ¹	Description
MS-NAE35xx-x (Base Features of Each NAE35)	NAE35 Network Automation Engines: Requires a 24 VAC power supply. Each model includes one RS-232-C serial port, one USB serial port, one Ethernet port, and an MS-BAT1020-0 Data Protection Battery.
MS-NAE3510-2	Supports one N2 Bus or BACnet MS/TP (RS-485) trunk; includes an additional RS-232-C serial port for optional external modem; supports a maximum of 50 devices on the N2 Bus or BACnet MS/TP trunk.
MS-NAE3510-2U	Supports one BACnet MS/TP (RS-485) trunk; includes an additional RS-232-C serial port for optional external modem; supports a maximum of 50 devices on the BACnet MS/TP trunk. Note: This model is UL Listed, File S4977, UUKL 864 - 9th Edition Smoke Control Equipment.
MS-NAE3511-2	Supports one N2 Bus or BACnet MS/TP (RS-485) trunk; includes an internal modem; supports a maximum of 50 devices on the N2 Bus or BACnet MS/TP trunk.
MS-NAE3514-2	Supports one N2 Bus or BACnet MS/TP (RS-485) trunk; limited to Basic Access support; includes an additional RS-232-C serial port for optional external modem; supports a maximum of 50 devices on the N2 Bus or BACnet MS/TP trunk.
MS-NAE3515-2	Supports one N2 Bus or BACnet MS/TP (RS-485) trunk; limited to Basic Access support; includes an internal modem; supports a maximum of 50 devices on the N2 Bus or BACnet MS/TP trunk.

Table 3: NAE35 Ordering Information (Part 2 of 2)

Product Code Number ¹	Description
MS-NAE3520-2	Supports one LONWORKS trunk; includes an additional RS-232-C serial port for optional external modem. Supports a maximum of 64 devices on the LONWORKS port.
MS-NAE3521-2	Supports one LONWORKS trunk; includes an internal modem. Supports a maximum of 64 devices on the LONWORKS port.
MS-NAE3524-2	Supports one LONWORKS trunk; limited to Basic Access support; and includes an additional RS-232-C serial port for optional external modem. Supports a maximum of 64 devices on the LONWORKS trunks.
MS-NAE3525-2	Supports one LONWORKS trunk; limited to Basic Access support; and includes an internal modem. Supports a maximum of 64 devices on the LONWORKS trunks.

1. Some models are also available in a Buy American version (add a G after the code number). For repair parts, add -702 after the code number.

Table 4: NAE45 Ordering Information

Product Code Number ¹	Description
MS-NAE45xx-x (Base Features of Each NAE45)	NAE45 Network Automation Engines: Requires a 24 VAC power supply. Each model includes one RS-232-C serial port, one USB serial port, one Ethernet port, and an MS-BAT1020-0 Data Protection Battery.
MS-NAE4510-2	Supports one N2 Bus or BACnet MS/TP (RS-485) trunk; includes an additional RS-232-C serial port for optional external modem; supports a maximum of 100 devices on the N2 Bus or BACnet MS/TP trunk.
MS-NAE4510-2U	Supports one BACnet MS/TP (RS-485) trunk; includes an additional RS-232-C serial port for optional external modem; supports a maximum of 100 devices on the BACnet MS/TP trunk. Note: This model is UL Listed, File S4977, UUKL 864 - 9th Edition Smoke Control Equipment.
MS-NAE4511-2	Supports one N2 Bus or BACnet MS/TP (RS-485) trunk; includes an internal modem; supports a maximum of 100 devices on the N2 Bus or BACnet MS/TP trunk.
MS-NAE4520-2	Supports one LONWORKS trunk, includes an additional RS-232-C serial port for optional external modem; supports a maximum of 127 devices on the LONWORKS port.
MS-NAE4521-2	Supports one LONWORKS trunk, includes an internal modem; supports a maximum of 127 devices on the LONWORKS port.

1. Some models are also available in a Buy American version (add a G after the code number). For repair parts, add -702 after the code number.

Table 5: NAE55 Ordering Information (Part 1 of 2)

Product Code Number ¹	Description
MS-NAE55xx-x (Base Features of Each NAE55)	NAE55 Network Automation Engines: Requires a 24 VAC power supply. Each model includes two RS-232-C serial ports, two USB serial ports, two RS-485 ports, one Ethernet port, and one MS-BAT1010-0 Data Protection Battery.
MS-NAE5510-1	Supports two N2 Bus or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk); supports a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk.
MS-NAE5510-1U	Supports two BACnet MS/TP (RS-485) trunks, which support a maximum of 100 devices on each BACnet MS/TP trunk. Note: This model is UL Listed, File S4977, UUKL 864 - 9th Edition Smoke Control Equipment.
MS-NAE5510-2	Supports two N2 Bus or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk); supports a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk.

Table 5: NAE55 Ordering Information (Part 2 of 2)

Product Code Number ¹	Description
MS-NAE5511-1	Supports two N2 Bus or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk); supports a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk; includes an internal modem.
MS-NAE5511-2	Supports two N2 Bus or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk); supports a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk; includes an internal modem.
MS-NAE5520-1	Supports a LONWORKS trunk, and two N2 Bus trunks or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk). Supports a maximum of 255 devices on the LONWORKS trunk and a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk
MS-NAE5520-2	Supports a LONWORKS trunk, and two N2 Bus trunks or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk). Supports a maximum of 255 devices on the LONWORKS trunk and a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk
MS-NAE5521-1	Supports a LONWORKS trunk, and two N2 Bus trunks or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk); includes an internal modem. Supports a maximum of 255 devices on the LONWORKS trunk and a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk.
MS-NAE5521-2	Supports a LONWORKS trunk, and two N2 Bus trunks or two BACnet MS/TP (RS-485) trunks (or one N2 Bus trunk and one BACnet MS/TP trunk); includes an internal modem. Supports a maximum of 255 devices on the LONWORKS trunk and a maximum of 100 devices on each N2 Bus or BACnet MS/TP trunk.

1. Some models are also available in a Buy American version (add a G after the code number). For the European versions of the NAE55, add an E after the code number. For repair parts, add -702 after the code number.

Table 6: NAE85 Ordering Information

Product Code Number	Description
MS-NIE8500-0	Rack-mount server preloaded with supported operating system, NxE85 software, and other Metasys system software components; supports up to 10,000 objects. Note: The NAE85 models ship as MS-NIE8500-0 models. Use the Change Model utility in the NxE85 Metasys software to change an NIE85 to an NAE85.
MS-NxE85SW-0 ¹	New NxE85 software only; for new installations/projects
MS-NxE85SW-6 ¹	Upgrade NxE85 software; for existing NxE85 engines

1. Standard NxE85 models support 10,000 objects; an expansion upgrade is available to support an additional 15,000 objects.

Table 7: NAE Accessories Ordering Information (Part 1 of 2)

Product Code Number	Description
MS-BAT1010-0	Replacement data protection battery for NAE55 and NIE55. Rechargeable gel cell battery: 12 V, 1.2 Ah, with a typical life of 3 to 5 years at 21°C (70°F)
MS-BAT1020-0	Replacement data protection battery for NAE35, NAE45, and NCE25. Rechargeable NiMH battery: 3.6 V 500 mAh, with a typical life of 5 to 7 years at 21°C (70°F)
MS-15KUPG-0	15,000 object expansion upgrade for NxE85 (only one expansion per NxE85)
MS-MULTENGSW-6	Contains ToggleTunnel utility for converting an NAE55/NIE55 to an NAE55 model with the N2 Tunneling features enabled. Not for use with MS-NAE5510-1U.
MS-RAP-0	Ready Access Portal Server provides a user interface that is a natural, complementary extension of the Metasys Site Management Portal user interface. Note: This option is not necessary for sites that have an ADS/ADX that is the Site Director because Ready Access Portal Server is provided with the ADS/ADX solution.

Table 7: NAE Accessories Ordering Information (Part 2 of 2)

Product Code Number	Description
MS-EXPORT-0	Export Utility extracts historical trend, alarm, and audit data from the system and presents the historical data in a variety of formats. Note: This option is not necessary for sites that have an ADS/ADX that is the Site Director because Export Utility is provided with the ADS/ADX solution.
AS-XFR100-1	Power transformer (Class 2, 24 VAC, 92 VA maximum output), with enclosure
AS-XFR010-1	Power transformer (Class 2, 24 VAC, 92 VA maximum output), no enclosure
SC450RM1U (OEM Part No.)	Recommended Uninterruptable Power Supply (UPS) for NxE85 model: American Power Conversion (APC®) Smart-UPS SC 450 VA, 280 W, 120 VAC input/output with NEMA 5-15R output connections

Technical Specifications

NAE35 and NAE45

Power Requirement	Dedicated nominal 24 VAC, Class 2 power supply (North America), Safety Extra-Low Voltage (SELV) power supply (Europe), at 50/60 Hz (20 VAC minimum to 30 VAC maximum)
Power Consumption	25 VA maximum
Ambient Operating Conditions	0–50°C (32–122°F); 10–90% RH, 30°C (86°F) maximum dew point
Ambient Storage Conditions	-40–70°C (-40–158°F); 5–95% RH, 30°C (86°F) maximum dew point
Data Protection Battery	Supports data protection on power failure. Rechargeable NiMH battery: 3.6 VDC 500 mAh, with a typical life of 5 to 7 years at 21°C (70°F); Product Code Number: MS-BAT1020-0
Processor	192 MHz Renesas™ SH4 7760 RISC processor
Memory	128 MB Flash nonvolatile memory for operating system, configuration data, and operations data storage and backup 128 MB Synchronous Dynamic Random Access Memory (DRAM) for operations data dynamic memory
Operating System	Microsoft® Windows® CE embedded
Network and Serial Interfaces	One Ethernet port; connects at 10 or 100 Mbps; 8-pin RJ-45 connector One optically isolated RS-485 port; 9.6k, 19.2k, 38.4k, or 76.8k baud (depending on protocol); with a pluggable and keyed 4-position terminal block (FC Bus available on NAE351x and NAE451x models only) One LONWORKS port; FTT10 78 Kbps; pluggable, keyed 3-position terminal block (LONWORKS port available on NAE352x-x and NAE452x models only) One RS-232-C serial port with standard 9-pin sub-D connector that supports standard baud rates. A second serial port, on models without an internal modem, that supports an optional, user-supplied external modem. One USB serial port with standard USB connector that supports an optional, user-supplied external modem. Option: One telephone port for internal modem; up to 56 Kbps; 6-pin modular connector (NAE models with an optional internal modem have one RS-232-C serial port only.)
Housing	Plastic housing material: ABS + polycarbonate Protection: IP20 (IEC 60529)
Mounting	On flat surface with screws on three mounting clips or a single 35 mm DIN rail
Dimensions (Height x Width x Depth)	131 x 270 x 62 mm (5-3/16 x 10-5/8 x 2-1/2 in.) Minimum space for mounting NAE35 and NAE45: 210 x 350 x 110 mm (8-3/16 x 13-13/16 x 4.-5/16 in.)
Shipping Weight	1.2 kg (2.7 lb)
Compliance	<p>United States: UL Listed, File E107041, CCN PAZX, UL 916, Energy Management Equipment, UL Listed, File S4977, UUKL 864 - 9th Edition, Smoke Control Equipment (MS-NAE35x0-2U and MS-NAE45x0-2U models only) FCC Compliant to CFR47, Part 15, Subpart B, Class A</p> <p>Canada: UL Listed, File E107041, CCN PAZX7, CAN/CSA C22.2 No. 205, Signal Equipment; Industry Canada Compliant, ICES-003</p> <p>Europe: CE Mark – Johnson Controls, Inc., declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive 2004/108/EC.</p> <p>Australia and New Zealand: C-Tick Mark, Australia/NZ Emissions Compliant</p> <p>BACnet International: BACnet Testing Laboratories™ (BTL) 135-2004 Listed BACnet Building Controller (B-BC)</p>



NAE55xx-1

Power Requirement	Dedicated nominal 24 VAC, Class 2 power supply (North America), Safety Extra-Low Voltage (SELV) power supply (Europe), at 50/60 Hz (20 VAC minimum to 30 VAC maximum)
Power Consumption	50 VA maximum
Ambient Operating Conditions	0–50°C (32–122°F); 10–90% RH, 30°C (86°F) maximum dew point
Ambient Storage Conditions	-40–70°C (-40–158°F); 5–95% RH, 30°C (86°F) maximum dew point
Data Protection Battery	Supports data protection on power failure. Rechargeable gel cell battery: 12 V, 1.2 Ah, with a typical life of 3 to 5 years at 21°C (70°F); Product Code Number: MS-BAT1010-0
Clock Battery	Maintains real-time clock through a power failure. Onboard cell; typical life 10 years at 21°C (70°F)
Processor	400 MHz Pentium® class Geode® GX533 processor for MS-NAE55xx-1 models
Memory	512 MB Flash nonvolatile memory for operating system, configuration data, and operations data storage and backup for MS-NAE55xx-1 models. 256 MB Synchronous Dynamic Random Access Memory (DRAM) for operations data dynamic memory for all models
Operating System	Microsoft Windows XP® embedded
Network and Serial Interfaces	One Ethernet port; connects at 10 or 100 Mbps; 8-pin RJ-45 connector Two optically isolated RS-485 ports; 9.6k, 19.2k, 38.4k, or 76.8k baud; pluggable and keyed 4-position terminal blocks Two RS-232-C serial ports, with standard 9-pin sub-D connectors, that support all standard baud rates Two USB serial ports, standard USB connectors support an optional, user-supplied external modem Options: One telephone port for internal modem; up to 56 Kbps; 6-pin modular connector One LONWORKS port; FTT10 78 Kbps; pluggable, keyed 3-position terminal block (LONWORKS port available on NAE552x-xxx models only)
Housing	Plastic housing with internal metal shield Plastic material: ABS + polycarbonate UL94-5VB Protection: IP20 (IEC 60529)
Mounting	On flat surface with screws on four mounting feet or on dual DIN rail
Dimensions (Height x Width x Depth)	226 x 332 x 96.5 mm (8-7/8 x 13-1/8 x 3-13/16 in.) including mounting feet Minimum space for mounting: 303 x 408 x 148 mm (12 x 16-1/8 x 5-13/16 in.)
Shipping Weight	2.9 kg (6.4 lb)
Compliance	<p>United States: UL Listed, File E107041, CCN PAZX, UL 916, Energy Management Equipment UL Listed, File S4977, UUKL 864 - 9th Edition, Smoke Control Equipment (MS-NAE55x0-1U models only) FCC Compliant to CFR47, Part 15, Subpart B, Class A</p> <p>Canada: UL Listed, File E107041, CCN PAZX7, CAN/CSA C22.2 No. 205, Signal Equipment, Industry Canada Compliant, ICES-003</p> <p>Europe: CE Mark – Johnson Controls, Inc., declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive 2004/108/EC.</p> <p>Australia and New Zealand: C-Tick Mark, Australia/NZ Emissions Compliant</p> <p>BACnet International: BACnet Testing Laboratories™ (BTL) 135-2004 Listed BACnet Building Controller (B-BC)</p>



NAE55xx-2

Power Requirement	Dedicated nominal 24 VAC, Class 2 power supply (North America), Safety Extra-Low Voltage (SELV) power supply (Europe), at 50/60 Hz (20 VAC minimum to 30 VAC maximum)
Power Consumption	50 VA maximum
Ambient Operating Conditions	0–50°C (32–122°F); 10–90% RH, 30°C (86°F) maximum dew point
Ambient Storage Conditions	-40–70°C (-40–158°F); 5–95% RH, 30°C (86°F) maximum dew point
Data Protection Battery	Supports data protection on power failure. Rechargeable gel cell battery: 12 V, 1.2 Ah, with a typical life of 3 to 5 years at 21°C (70°F); Product Code Number: MS-BAT1010-0
Clock Battery	Maintains real-time clock through a power failure. Onboard cell; typical life 10 years at 21°C (70°F)
Processor	1.6 GHz Intel® Atom™ processor
Memory	4 GB Flash nonvolatile memory for operating system, configuration data, and operations data storage and backup 1 GB Synchronous Dynamic Random Access Memory (DRAM) for operations data dynamic memory for all models
Operating System	Microsoft® Windows® Embedded Standard (WES) 2009
Network and Serial Interfaces	One Ethernet port; connects at 10 Mbps, 100 Mbps, or 1 Gbps; 8-pin RJ-45 connector Two optically isolated RS-485 ports; 9.6k, 19.2k, 38.4k, or 76.8k baud; pluggable and keyed 4 position terminal blocks (RS-485 ports available on NAE55 models only) Two RS-232-C serial ports, with standard 9-pin sub-D connectors, that support all standard baud rates Two USB serial ports; standard USB connectors support an optional, user-supplied external modem Options: One telephone port for internal modem; up to 56 Kbps; 6-pin modular connector One LONWORKS port; FTT10 78 Kbps; pluggable, keyed 3-position terminal block (LONWORKS port available on NAE552x-x models only)
Housing	Plastic housing with internal metal shield Plastic material: ABS + polycarbonate UL94-5VB; Protection: IP20 (IEC 60529)
Mounting	On flat surface with screws on four mounting feet or on dual 35 mm DIN rail
Dimensions (Height x Width x Depth)	226 x 332 x 96.5 mm (8-7/8 x 13-1/8 x 3-13/16 in.) including mounting feet Minimum space for mounting: 303 x 408 x 148 mm (12 x 16-1/8 x 5-13/16 in.)
Shipping Weight	2.9 kg (6.4 lb)
Compliance	<p>United States: UL Listed, File E107041, CCN PAZX, UL 916, Energy Management Equipment, FCC Compliant to CFR47, Part 15, Subpart B, Class A</p> <p>Canada: UL Listed, File E107041, CCN PAZX7, CAN/CSA C22.2 No. 205, Signal Equipment, Industry Canada Compliant, ICES-003</p> <p>Europe: CE Mark – Johnson Controls, Inc., declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive 2004/108/EC.</p> <p>Australia and New Zealand: C-Tick Mark, Australia/NZ Emissions Compliant</p> <p>BACnet International: BACnet Testing Laboratories™ (BTL) 135-2004 Listed BACnet Building Controller (B-BC)</p>



NAE85 Turnkey

Computer Type	Dell® PowerEdge® R410
Power Requirement	100–240 VAC 50/60 Hz
Power Supply	480 W
Ambient Operating Conditions	10–35°C (50–95°F); 20–80% RH, noncondensing (twmax=29C)
Ambient Storage Conditions	-40–65°C (-40–149°F); 5–95% RH, noncondensing (twmax=38C)
Data Protection	Recommended Uninterruptable Power Supply (UPS): American Power Conversion (APC®) Smart-UPS SC 450 VA, 280 W, 120 VAC input/output, NEMA 5-15R output connections, OEM Part No. SC450RM1U
Processor	Intel® Xeon® E5506, 2.13 GHz, 4 MB Cache
Memory	2 GB DDR2, 1066 MHz, 2 x 1 GB, Single Ranked UDIMMs for 1 Processor
Hard Disk	2 x 160 GB 7.2K RPM Serial Advanced Technology Attachment (SATA), 8.9 cm (3.5 in.) Cabled 3 Gbps, RAID 1 configuration with add-in SAS6/iR (SATA/SAS Controller)
Internal Optical Drive	DVD ROM, SATA
Operating System	Microsoft® Windows® Web Server 2008 R2 Operating System (64-bit)
AntiVirus Software	Symantec® AntiVirus Corporate Edition Version 11
Network and Serial Interfaces	2 RJ45 1-Gbps Ethernet ports, Port 2 is disabled 2 video ports; 1 front, 1 back 1 9-pin Serial port 4 USB ports (2 front, 2 back)
Dimensions (Height x Width x Depth)	4.3 x 43.4 x 62.7 cm (1-11/16 x 17-1/8 x 24-11/16 in.)
Mounting	Mount in an EIA-310D compatible server cabinet
Shipping Weight	15.9 kg (35 lb)
Compliance	Europe: CE Mark (Record Holder: www.dell.com/regulatory_compliance) BACnet International: BACnet Testing Laboratories™ (BTL) 135-2004 Listed BACnet Building Controller (B-BC)

NAE85 Software System Requirements for Installation/Upgrade

Product Code	MS-NxE85SW-0	NxE85 software for 10,000 objects (new projects only software)
Recommended Computer Platform	Intel® Xeon® E5506, 2.13 GHz, 4 MB Cache 2 x 160 GB 7.2K RPM Serial Advanced Technology Attachment (SATA), 8.9 cm (3.5 in.) Cabled 3 Gbps, RAID 1 configuration with add-in SAS6/iR (SATA/SAS Controller) DVD ROM, SATA	
Memory	1 GB RAM minimum	
Hard Disk	160 GB minimum	
Supported Operating Systems and Software	Microsoft® Windows® Web Server 2008 R2 OS (64-bit) IIS Version 7.5, Microsoft .NET Framework Version 3.5.1 Microsoft Windows Web Server 2008 OS (32-bit) with SP1 IIS Version 7.0, Microsoft .NET Framework Version 3.5 with SP1 Microsoft Windows 2003 Web Edition OS¹ (32-bit) with SP2 IIS Version 6.0, Microsoft .NET Framework Version 3.5 with SP1	
Network Communication	Network Interface: Single 1 Gbps Ethernet network interface card connects at 10 Mbps, 100 Mbps or 1Gbps; (100 Mbps or better recommended)	
Data Protection	Recommended Uninterruptible Power Supply (UPS): American Power Conversion (APC®) Smart-UPS SC 450VA, 280 W, 120 VAC input/output, NEMA 5-15R output connections, OEM Part No. SC450RM1U	
Compliance	BACnet International: BACnet Testing Laboratories™ (BTL) 135-2004 Listed BACnet Building Controller	

1. We support the 32-bit version only. We do not support the 64-bit version.

The performance specifications are nominal and conform to acceptable industry standard. For application at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products.

United States Emissions Compliance

This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when this equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his/her own expense.

Canadian Emissions Compliance

*This Class (A) digital apparatus meets all the requirements of the Canadian Interference-Causing Equipment Regulations.
Cet appareil numérique de la Classe (A) respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.*



Building Efficiency
507 E. Michigan Street, Milwaukee, WI 53202

*Metasys® and Johnson Controls® are registered trademarks of Johnson Controls, Inc.
All other marks herein are the marks of their respective owners. © 2011 Johnson Controls, Inc.*